




AS/CTM-15 General Purpose Timer Installation Instruction

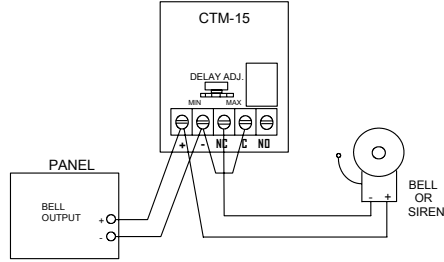

Operating Specifications

Input Specifications:

- ◆ Input: 6VDC to 12VDC nominal
- ◆ Standby: 0 amps
- ◆ During Timeout: 0.010 amps
- ◆ End of Timeout: 0.115 amps @ 6VDC or 12VDC
- ◆ Coil Resistance: 100 ohms

Adjustments

- ◆ Time Range adjustable from 5 seconds to 15 minutes

Outputs

- ◆ Relay energizes after timeout
- ◆ Form "C" Relay contact
- ◆ 3 Amp DC contact rating (resistive)

Troubleshooting Guide


Not Cutting Off

1. Measure and verify the DC voltage at the Input Terminals.
2. Adjust time delay to minimum and verify time-out for proper operation.
3. Verify relay contact integrity.

52-003
Rev A.01



AS/CTM-15 General Purpose Timer Installation Instruction

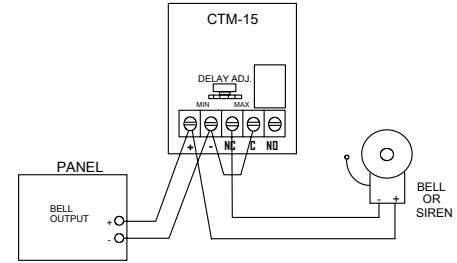

Operating Specifications

Input Specifications:

- ◆ Input: 6VDC to 12VDC nominal
- ◆ Standby: 0 amps
- ◆ During Timeout: 0.010 amps
- ◆ End of Timeout: 0.115 amps @ 6VDC or 12VDC
- ◆ Coil Resistance: 100 ohms

Adjustments

- ◆ Time Range adjustable from 5 seconds to 15 minutes

Outputs

- ◆ Relay energizes after timeout
- ◆ Form "C" Relay contact
- ◆ 3 Amp DC contact rating (resistive)

Troubleshooting Guide


Not Cutting Off

1. Measure and verify the DC voltage at the Input Terminals.
2. Adjust time delay to minimum and verify time-out for proper operation.
3. Verify relay contact integrity.

52-003
Rev A.01



AS/CTM-15 General Purpose Timer Installation Instruction

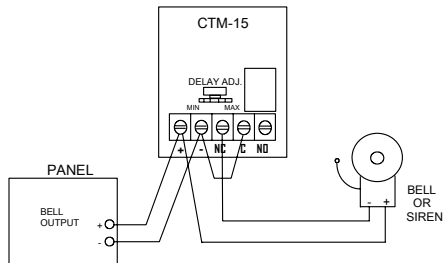

Operating Specifications

Input Specifications:

- ◆ Input: 6VDC to 12VDC nominal
- ◆ Standby: 0 amps
- ◆ During Timeout: 0.010 amps
- ◆ End of Timeout: 0.115 amps @ 6VDC or 12VDC
- ◆ Coil Resistance: 100 ohms

Adjustments

- ◆ Time Range adjustable from 5 seconds to 15 minutes

Outputs

- ◆ Relay energizes after timeout
- ◆ Form "C" Relay contact
- ◆ 3 Amp DC contact rating (resistive)

Troubleshooting Guide


Not Cutting Off

1. Measure and verify the DC voltage at the Input Terminals.
2. Adjust time delay to minimum and verify time-out for proper operation.
3. Verify relay contact integrity.

52-003
Rev A.01



AS/CTM-15 General Purpose Timer Installation Instruction

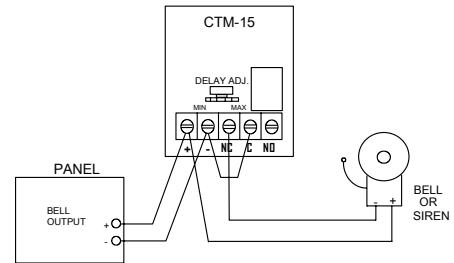

Operating Specifications

Input Specifications:

- ◆ Input: 6VDC to 12VDC nominal
- ◆ Standby: 0 amps
- ◆ During Timeout: 0.010 amps
- ◆ End of Timeout: 0.115 amps @ 6VDC or 12VDC
- ◆ Coil Resistance: 100 ohms

Adjustments

- ◆ Time Range adjustable from 5 seconds to 15 minutes

Outputs

- ◆ Relay energizes after timeout
- ◆ Form "C" Relay contact
- ◆ 3 Amp DC contact rating (resistive)

Troubleshooting Guide

Not Cutting Off

1. Measure and verify the DC voltage at the Input Terminals.
2. Adjust time delay to minimum and verify time-out for proper operation.
3. Verify relay contact integrity.

52-003
Rev A.01